

10ft. Free Standing Mesh Panel Display Wall

Assembly Instructions for Standard Foot Plate **-or-** WheelSet models

PARTS LIST

- (4) Male Pole Sections
- (2) Long Female Pole Sections
- (2) Short Female Pole Sections
- (1) Mesh Panel – 10-ft x 7-ft
- (2) Ell Joints
- (2) StaBar Ell Joints – use with Standard Feet only
- (2) Standard Foot Plates **-or-** WheelSet Foot Plates
- (2) Ball Bungees
- (7) Thumbscrews
- (24) S-Hooks



Standard Foot Plate



-or- WheelSet Foot Plate




Ell Joint



StaBar Ell Joint

ASSEMBLY

1. Connect the male poles to the female poles and click into place. The two 10-ft long poles are the top and bottom horizontal poles; the two 7-ft long poles are the legs.



2. Slide an Ell Joint onto each end of one of the 10-ft long poles



3. Slide a StaBar Ell (white arrow down) and then a Foot Plate onto each leg pole **-or-** attach a WheelSet to the bottom of each of the 7-ft leg poles.




4. Connect the leg pole assemblies and upper horizontal pole as illustrated.





5. With a helper, lift the frame and set it on its feet. The foot plates should be perpendicular to the frame as shown in the illustration. Securely tighten the thumbscrews on the foot plates.

6. Attach the bottom horizontal bar by sliding one end of the remaining long pole into the StaBar ell until it clicks into place, then slide the other end and click it into place. Securely tighten the thumbscrews on the StaBar ells.

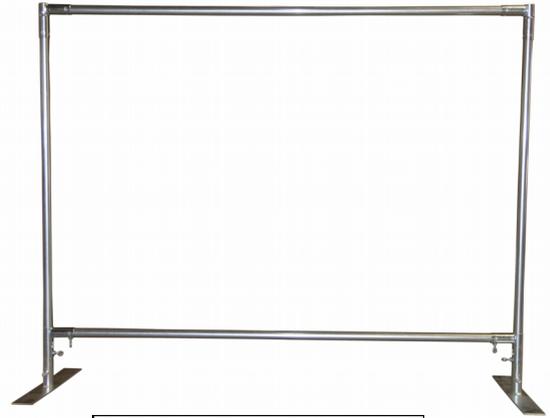

Hanging the Mesh Panel

7. Unroll the Mesh Panel so that you have the edge with aluminum hooks in your hand.
8. Attach the hooks to the **top horizontal pole** of the frame.
9. Check that Mesh Panel is centered between the legs of the frame.
10. Attach buckles at the bottom of the Mesh Panel to the **bottom bars** of the frame beginning with the center buckle.
11. Attach the Velcro straps on the sides of the Mesh Panel to the frame legs beginning with the top two on one side.
12. Attach the top two Velcro straps on the opposite side – while pulling the panel to make it taut., then attach the lower two Velcro straps on each side.



TO HANG ARTWORK

The specially woven and heat-treated mesh of your MeshPanels will support items up to 15 pounds using a pair of S-hooks (we recommend using S-hooks in pairs for every item displayed).

HELPFUL HINT: When packing up, re-attach Velcro straps while removing panel. This will make the next set-up easier. **DO NOT STORE OR CARRY POLES IN MESH PANEL BAG!!! USE BLACK BALL BUNGEEES PROVIDED TO BUNDLE & TRANSPORT POLES**